


EPIC® SENSORS METRIC FRAC

Compression fitting

Features

- parallel pipe threads
- compression fitting will allow tight process fitting without additional welding process for pipe like structures
- nearest metric equivalent may be used for C and F hex flats
- single ferrule (CPI type) will be used upto 2 mm ØOD tube, from 3 mm ØOD tube and onward double ferrule structure will be used

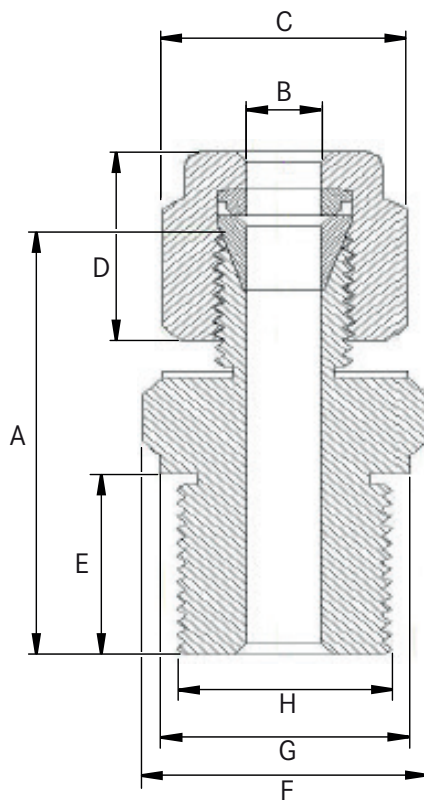

B [in] Tube OD	H Metric Thread	C Nut	D [mm]	A [mm]	E [mm]	F [in] Body	G [mm]
1/8"	M8x1	7/16"	12,0	23,3	7,5	9/16"	13,6
1/8"	M8x1,25	7/16"	12,0	23,3	7,5	9/16"	13,6
1/8"	M12x1	7/16"	12,0	27,2	11,0	11/16"	16,3
3/8"	M22x1,5	11/16"	14,2	35,5	13,0	9/8"	27,0